



## LUMEN POWER<sup>TM</sup>

### 30 WATT ELECTRONIC UNIV 5 IN 1 DIMMING TRANSFORMER LPE5

Lumenpower LPE530 is our 5 in 1 Indoor/Outdoor LED 30 Watt Transformer, 0-10V, 100-277V, Triac Forward and Reverse Phase, Resister, PWM. Our Transformer works with many types of dimmer such as LED, MLV, ELV, 0-10V, Flicker Free Dimming, Smooth Dimming with only 5% minimum Load.

## SPECIFICATION

|  |                             |
|--|-----------------------------|
| <b>OUTPUT WATTAGE:</b>   | 30                          |
| <b>INPUT VOLTAGE:</b>  | 100-277V 50/60Hz            |
| <b>OUTPUT CURRENT:</b>   | 10A                         |
| <b>DIMMABLE:</b>   | LED, MLV, ELV, 0-10V, TRIAC |
| <b>MAX OPERATION TEMPERATURE:</b>  | 130 °F                      |
| <b>STORAGE TEMPERATURE:</b>  | -65 °F to 125 °F            |
| <b>MINIMUM LOAD:</b>   | 5%                          |
| <b>WARRANTY:</b>   | 5 years                     |
| <ul style="list-style-type: none"> <li>- Input leads are 18 AWG 600V</li> <li>- Output leads are 18 AWG 300V</li> <li>- Transformer is encapsulated in enclosure.</li> <li>- The enclosure is black powder coated steel</li> </ul> |                             |
| <b>DIMENSIONS (INCH):</b>  | H = 9.92, W = 4.25, D = 1.8 |
| <b>WEIGHT:</b>   | 5 lbs                       |

## FEATURES

- ✓ 5 in 1 Dimming Transformer
- ✓ Indoor/Outdoor
- ✓ Dimmable by LED, MLV, ELV, 0-10V, TRIAC
- ✓ Smooth Dimming
- ✓ Protection overload

## RATINGS




### Product Model Number

### Job Name / Location

### Type, Quote

## DIMENSIONS

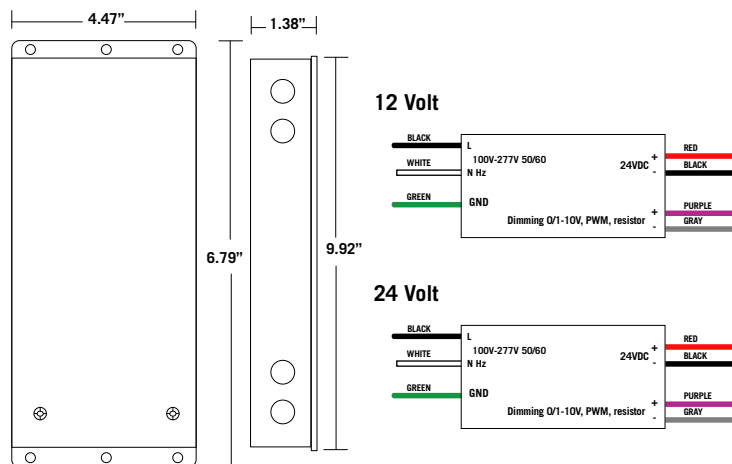

## ORDERING GUIDE

EXAMPLE: LPE5-30W-12VDC

|                 |             |                     |
|-----------------|-------------|---------------------|
| <b>MODEL:</b>   | <b>LPE5</b> | LPE5                |
| <b>WATTAGE:</b> | <b>30W</b>  | 30 (30 watts)       |
| <b>VOLTAGE:</b> | <b>12</b>   | 12 (12V) / 24 (24V) |